




LOUVOLITE

OneTouch® REMOTE CONTROLS


FOR USE WITH R1912 AND R1918-AUS

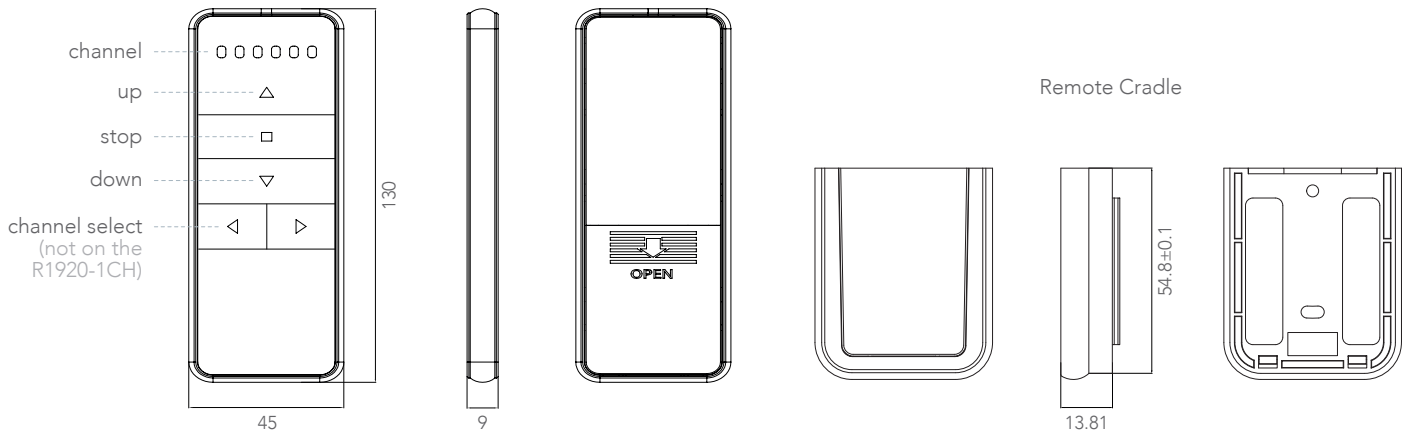


1 Channel Remote
R1920-1CH



2 Channel Remote
R1921-2CH



6 Channel Remote
R1922-6CH



16 Channel Remote
R1924-16CH



FEATURES

- Simple to use.
- Symmetrical design with a high end gloss finish.
- Energy saving design with CR2450 battery power for up to two years.
- Ability to lock channels if needed.
- Can group motors over numerous channels.
- All remotes have been drop tested to make sure they withstand regular use.
- 2 year warranty

SPECIFICATIONS

Rated Voltage	3V (CR2450)
Radio Frequency	433.92MHz
Transmitting Power	≤ 10mW
Temp Working Range	-4°F to 131°F (-20°C to 55°C)
RF Modulation	ASK
Lock Function	Yes
Transmission Distance	Up to 80 meters, dependent upon environment

APPLICATIONS



Roller



Roman



Vision



Visage

LOUVOLITE